


SAFES

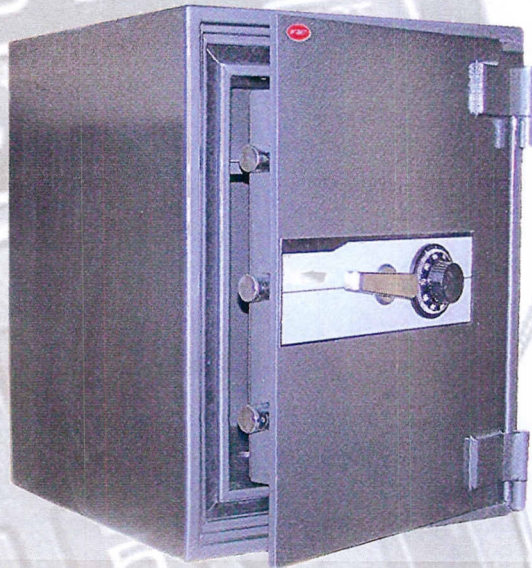

COMBINATION CARD

TURN DIAL DATE _____

RIGHT _____ TIMES TO _____

LEFT _____ TIMES TO _____


RIGHT _____ TIMES TO _____

LEFT _____ TIMES TO _____

RIGHT SLOWLY UNTIL DIAL COMES TO FULL STOP


FIRE RESISTANT

- '1' Hour Fire Rated (350°F) / Data Safes (125°F)



| Model # | Outside Dimensions | | | Inside Dimensions | | | Tray | Shelf | WT. LBS. |
|--------------|--------------------|------|------|-------------------|------|------|------|-------|----------|
| | H" | W" | D" | H" | W" | D" | | | |
| BS-K320/D320 | 12.6 | 16.2 | 13 | 9.2 | 13.3 | 9 | 1 | - | 79 |
| BS-D340/T340 | 13.4 | 17.1 | 14.6 | 9.5 | 13.4 | 9.5 | 1 | - | 88 |
| BS-D370/T370 | 14.2 | 19 | 15.8 | 8.5 | 14 | 11.8 | 1 | - | 110 |
| BS-D510/T510 | 19.7 | 13.5 | 15.8 | 14 | 8.5 | 11.8 | 1 | 1 | 121 |
| BDS-610D | 24 | 17.7 | 18 | 12.4 | 8.5 | 7.8 | - | 1 | 216 |
| BDS-880D | 34.7 | 23.3 | 20.1 | 21.8 | 13.1 | 9.5 | - | 2 | 457 |
| BDS-1000D | 39.4 | 23.6 | 21 | 26.1 | 13.1 | 9.6 | - | 3 | 541 |

- '2' Hour Fire Rated



| Model # | Outside Dimensions | | | Inside Dimensions | | | Tray | Shelf | WT. LBS. |
|--------------|--------------------|------|------|-------------------|------|------|------|-------|----------|
| | H" | W" | D" | H" | W" | D" | | | |
| BS-D610/T610 | 24 | 17.7 | 18 | 16.6 | 12.7 | 12.2 | 1 | 1 | 176 |
| BS-C670 | 26.4 | 19.7 | 18.5 | 18.5 | 14.2 | 12.2 | 1 | 1 | 220 |
| BS-C750 | 29.5 | 20.9 | 20 | 21.3 | 15.3 | 13.6 | 1 | 1 | 297 |
| BS-C880/T880 | 34.6 | 23.2 | 20 | 26.2 | 17.5 | 13.6 | 1 | 1 | 374 |
| BS-C1000 | 39.4 | 23.6 | 21 | 30.5 | 18 | 14.2 | 1 | 2 | 440 |
| BS-C1200 | 47.2 | 27.6 | 25 | 37.2 | 21 | 18.1 | 1 | 2 | 572 |
| BS-C1400 | 55.1 | 27.6 | 25 | 45 | 21 | 18.1 | 1 | 3 | 704 |
| BS-C1600 | 63 | 31.5 | 25 | 53 | 24.8 | 18 | 1 | 3 | 902 |
| BS-C1700 | 67 | 31.5 | 25 | 56.2 | 24.8 | 18.1 | 1 | 3 | 1034 |
| BS-C1750 | 67.3 | 45.3 | 25 | 56.9 | 38.6 | 18.1 | 2 | 3 | 1650 |

K: Key Lock
D: Dial Lock

C: Changeable Dial Lock
T: Digital Lock

In—Wall

- Designed for installation between 16" wall studs
- UL listed group II combination lock



SFW-52EN EWS-1514E WS-2014C

| Model # | Outside Dimensions | | | Inside Dimensions | | | Shelf | WT. Lbs. |
|----------------|--------------------|------|-----|-------------------|------|-----|-------|----------|
| | H" | W" | D" | H" | W" | D" | | |
| WS-1014C/1014E | 12 | 16 | 4 | 10 | 13.3 | 2.3 | 1 | 22 |
| WS-2014C/2014E | 22 | 16 | 6.3 | 20 | 13.5 | 5.5 | 2 | 51 |
| EWS-1514E | 15 | 16 | 4 | 13 | 13.8 | 3 | 1 | 30 |
| SFW-52EN-4 | 20.7 | 13.8 | 3.7 | 20.3 | 13.4 | 3.4 | 2 | 38 |
| SFW-52EN-6 | 20.7 | 13.8 | 6 | 20.3 | 13.4 | 4.5 | 2 | 42 |

Under Counter

Provide instant protection of cash deposits via the anti fish deposit slot over the door recommended for any operation that requires money drops or till trimming



UC-0810CS UC-1209 UC-1206

| Model # | Outside Dimensions | | | Inside Dimensions | | | Deposit (Inch) | WT. Lbs. |
|----------|--------------------|----|----|-------------------|-----|------|----------------|----------|
| | H" | W" | D" | H" | W" | D" | | |
| UC-1206 | 12 | 6 | 8 | 10.8 | 5.5 | 6.2 | 0.75x5.5 | 30 |
| UC-0612 | 8 | 6 | 12 | 6.8 | 5.5 | 10.2 | 0.75x5.5 | 30 |
| UC-1209 | 12 | 8 | 10 | 10.8 | 7.5 | 8.2 | 0.75x6.5 | 34 |
| UC0810CS | 8 | 10 | 12 | 7.5 | 9.5 | 10 | 0.5X6 | 31 |

B-Rated

- 1/2" thick solid steel plate door & formed "B" rate steel plate body
- UL listed group 2 combination lock
- Bolt down holes
- High quality 3 wheel combination lock or optional electronic lock



B 1220 B 1414 B 2020 B 3018 B 3220-IC

| Model # | Outside Dimensions | | | Inside Dimensions | | | Shelf | WT. Lbs. |
|-----------|--------------------|------|------|-------------------|------|------|-------|----------|
| | H" | W" | D" | H" | W" | D" | | |
| B 2020 | 20.5 | 20.5 | 20 | 20 | 19.6 | 17 | 1 | 194 |
| B 1220 | 12 | 20.5 | 20 | 11.8 | 20.3 | 16 | - | 123 |
| B 1414 | 14 | 14 | 14 | 13.5 | 13.5 | 11.5 | - | 88 |
| B 3220-IC | 32.7 | 19.7 | 17.8 | 7.5 | 19 | 13 | 2 | 263 |
| B 3018 | 30.5 | 19.6 | 18.6 | 30 | 19 | 15.5 | 2 | 245 |

B-Rated Deposit

- 1/2"-A36 solid steel plate door
- Formed "B" rate steel plate body
- UL group 2 combination locks
- Direct loading, rear / front loading or rotary hopper
- Bolt down holes



LG 2730D FL 2720C FL 3414 MB3321 FLD 2714CK RH 2218C B 2020S FL 2014C

| Model # | Outside Dimensions | | | Inside Dimensions | | | Shelf | WT. Lbs. |
|----------------|--------------------|------|------|-------------------|------|------|-------|----------|
| | H" | W" | D" | H" | W" | D" | | |
| B 2020S | 20.5 | 20.5 | 20 | 8.8 | 19 | 16 | 1 | 196 |
| B 1414S | 14 | 14 | 14 | 13.8 | 13.5 | 11.3 | - | 88 |
| FL 2014C/2014E | 20.3 | 14 | 14 | 11.5 | 13.5 | 11 | - | 99 |
| FL 2714-DK | 27 | 14 | 14 | 15.5 | 13.8 | 11.3 | - | 117 |
| FL 2720-IC | 27 | 19 | 22 | 15 | 18 | 17 | - | 238 |
| RH 2012K/2012C | 21 | 13 | 14.5 | 14 | 12.5 | 10.3 | - | 124 |
| RH 2014 | 20 | 14 | 14 | 13 | 13.5 | 11.5 | - | 93 |
| MB3321 | 33 | 21 | 21 | 12 | 20.5 | 17.5 | - | 355 |
| RH 2218C | 22 | 18 | 20 | 15 | 17.5 | 16.5 | - | 133 |
| FL 3414 | 34 | 14 | 14 | 9 | 13.8 | 11 | - | 170 |
| FL 4020CC | 39.8 | 20 | 20 | 11 | 19.8 | 17 | 1 | 245 |
| RL 2818C | 28 | 18 | 20 | 27.8 | 17.8 | 17.5 | 1 | 220 |
| FL 2714-IC | 27 | 14 | 14 | 9.8 | 13.8 | 9.8 | - | 141 |
| LG 2730D | 27.3 | 30.8 | 21 | 18.5 | 13.8 | 18 | 1 | 285 |
| | | | | 27 | 16.5 | 18 | | |

In—Floor

Body B-rate construction with large storage capacity and flush cover plate for total concealment under a carpet



B 1500E LQ 1212S LQ 1216

| Model # | Outside | | | Inside | | | WT. Lbs. |
|---------------|---------|------|------|--------|------|------|----------|
| | H" | W" | D" | H" | W" | D" | |
| LQ-1212/1212S | 12.5 | 10 | 10 | 8 | 9.5 | 9.3 | 55 |
| LQ-1216/1216S | 16.3 | 9.5 | 9.3 | 12 | 9.3 | 9 | 57 |
| B 1500/1500E | 12.8 | 14.1 | 12.8 | 8 | 14.2 | 11.9 | 104 |
| B 1600/1600S | 16.4 | 12.8 | 14.6 | 11.3 | 12 | 14 | 106 |
| B 1806C/1806E | 9 | 12.7 | 19 | 6 | 12.3 | 18.5 | 110 |

The BF Series

- Burglary and fire safes
- UL class 350°F, one hour fire label
- Formed body consisting of 3/16" steel outer layer, 1/8" inner layer
- Massive 4 3/4" thick door with 1/2" solid steel outer skin
- 1 1/2" thick locking bolts
- Double curvature frames provide virtually airtight construction preventing smoke and heat damage.
- 3-wheel changeable combination lock
- Anchor hole



| Model # | Outside Dimensions | | | Inside Dimensions | | | Shelf | WT. Lbs. |
|---------|--------------------|------|------|-------------------|------|------|-------|----------|
| | H" | W" | D" | H" | W" | D" | | |
| BF 2020 | 20 | 20.5 | 22.5 | 13.8 | 15.6 | 15.2 | 1 | 382 |
| BF 2620 | 26 | 20.5 | 22.5 | 19.8 | 15.6 | 15.2 | 2 | 470 |
| BF 3820 | 38 | 20.5 | 22.5 | 31.8 | 15.6 | 15.2 | 3 | 673 |
| HS 2214 | 22 | 14 | 16 | 18.8 | 11 | 11.5 | 1 | 150 |

Security


- Electronic lock with override key and easy to program 3-8 digit code
- Pre-drilled holes with fixing bolts
- Double protection with combination lock & key lock
- Powder coated finish
- Inside 4x"AA" batteries



| Model # | Outside Dimensions | | | Inside Dimensions | | | Shelf | WT. Lbs. |
|----------------|--------------------|------|------|-------------------|------|------|-------|----------|
| | H" | W" | D" | H" | W" | D" | | |
| S-25V / 25K | 10 | 14 | 10 | 9.6 | 13.6 | 8 | - | 28 |
| SFT-12EBD | 5 | 12 | 14.5 | 3 | 11.5 | 14 | - | 25 |
| SFT-25ED/25EDM | 10 | 14 | 10 | 9.5 | 13.5 | 8 | - | 22 |
| SFT-45EDL | 10 | 18 | 14.5 | 9.5 | 17.3 | 12.4 | 1 | 38 |
| SFT-56ED | 20.5 | 13.8 | 14.2 | 20 | 13.5 | 12 | 1 | 58 |
| UC-0810C | 8 | 10 | 12 | 7.5 | 9.5 | 10 | - | 31 |

BF

- 2 1/2" thick door
- Bolt down hole
- Spring loaded tempered glass re-locker
- Deadbolts on hinge side
- 3/4" solid chrome plated locking bolts
- Stainless fascia plates
- Adjustable shelves
- UL 3 wheel group 2 combination lock



| Model # | Outside Dimensions | | | Inside Dimensions | | | Shelf | WT. Lbs. |
|---------|--------------------|------|------|-------------------|------|------|-------|----------|
| | H" | W" | D" | H" | W" | D" | | |
| RS-0 | 17.3 | 15 | 16.8 | 13 | 10.3 | 12.3 | 1 | 150 |
| RS-1 | 20 | 17.8 | 17.8 | 15.3 | 13 | 12.3 | 1 | 175 |
| RS-2 | 25.8 | 21.3 | 20 | 21.5 | 16.5 | 15.5 | 2 | 225 |
| RS-3 | 31.8 | 21.3 | 20 | 27.5 | 16.5 | 15.5 | 2 | 300 |
| RS-4 | 31.8 | 28.3 | 28.3 | 27.5 | 23.5 | 23.5 | 2 | 450 |
| RS-5 | 39.8 | 28.3 | 28.3 | 35.5 | 23.5 | 23.5 | 3 | 600 |

Super Tuff (Class 2)

- High security composite Burglary/Fire safes
- E-rate body construction
- UL Group II combination lock protected by a hardened steel plate and a relocker
- Class 350°F, 1-hour fire label
- Class 2 Fire/burglary safe and built to TL-15 specifications
- Bolts interlock within reinforced bolt chambers
- High quality adjustable hinges
- 1 1/2" diameter steel bolts.



| Model # | Outside Dimensions | | | Inside Dimensions | | | Shelf | WT. Lbs. |
|---------|--------------------|------|------|-------------------|------|----|-------|----------|
| | H" | W" | D" | H" | W" | D" | | |
| ST-1212 | 16 | 16 | 16.5 | 12 | 12 | 10 | - | 370 |
| ST-2014 | 24 | 18.5 | 21.5 | 20 | 14.5 | 15 | 1 | 570 |
| ST-2517 | 29 | 21.5 | 21.5 | 25 | 17.5 | 15 | 1 | 840 |
| ST-3219 | 37 | 23.5 | 23.5 | 32 | 19.5 | 17 | 2 | 1326 |
| ST-4520 | 49 | 24.5 | 27.5 | 45 | 20.5 | 21 | 3 | 1507 |
| ST-5520 | 59 | 24.5 | 27.5 | 55 | 20.5 | 21 | 4 | 1590 |

ULTL30 (Class 3)

- UL TL-30 certified
- Bolts inter-lock within reinforced bolt chambers
- 3-way boltwork (on 3219)
- UL Group II Lock with spy proof dial
- 1 1/2" steel bolts
- Glass relocking system
- Heavy plate steel frame
- Adjustable hinges
- Class 3 burglary safe
- Class 350°F, 1 hour fire label



| Model # | Outside Dimensions | | | Inside Dimensions | | | Shelf | WT. Lbs. |
|------------|--------------------|------|------|-------------------|------|----|-------|----------|
| | H" | W" | D" | H" | W" | D" | | |
| TL 30 2014 | 27 | 21.5 | 24 | 20 | 14.5 | 15 | 1 | 1050 |
| TL 30 2517 | 32 | 24.5 | 24 | 25 | 17.5 | 15 | 1 | 1450 |
| TL 30 3219 | 39 | 26.5 | 26.5 | 32 | 19.5 | 17 | 2 | 1730 |
| TL 30 4520 | 52 | 27.5 | 30 | 45 | 20.5 | 21 | 3 | 2560 |
| TL 30 5520 | 62 | 27.5 | 30 | 55 | 20.5 | 21 | 4 | 2975 |
| TL 30 6523 | 72 | 30 | 30 | 65 | 23 | 21 | 5 | 3290 |
| TL 30 6532 | 72 | 39 | 30 | 65 | 32 | 21 | 5 | 3855 |

Cash Depository FL & RH

- Class B insurance rating with 1/2" thick high strength steel door
- UL group 2 combination lock
- Bolt down holes
- Relocking device
- Optional electronic lock
- Hinge side inter-locks from inside to resist hinge removal



| Model # | Outside Dimensions | | | Inside Dimensions | | | Shelf | WT. Lbs. |
|-------------------|--------------------|------|------|-------------------|------|------|-------|----------|
| | H" | W" | D" | H" | W" | D" | | |
| FL 20/RL 20/RH 20 | 20 | 14 | 14 | 12.5 | 14 | 10.3 | - | 136 |
| FL 25 | 25 | 14.5 | 14.5 | 15 | 14 | 12 | - | 185 |
| FL 27 | 27 | 16 | 19 | 19.5 | 15.5 | 15.5 | - | 209 |
| FL-DBL/RL-DBL | 33 | 21 | 21 | 12 | 20.5 | 17.5 | - | 345 |
| | | | | 12 | 20.5 | 17.5 | | |